

RP 560

Optical Power Meter

Bluetooth[®]-Enabled for SM and MM Testing

The RP 560 optical power meter provides users with a simple platform for testing fiber optic cables at all connection points in the network. A highly-navigable interface and Bluetooth functionality help to expedite the fiber testing process for busy technicians.

Capable of displaying and testing 2 wavelengths at once, the RP 560 cuts dB loss testing time in half when used with the DLS 655 laser source or DLS 650 LED source. The power meter automatically detects the wavelength output from the light source and displays the output power/loss for each detected wavelength.


Saving data from multiple sites is as simple as identifying a new folder within the RP 560 menu and beginning the test process. All data points are automatically saved into the selected folder, so multiple sites can be tested and saved before data needs to be offloaded for reporting.

For users operating in a bench-top or manufacturing environment, the data from the RP 560 can be mirrored to a Windows[®], Android[™], or Apple[®] iOS device using USB (Windows only) or Bluetooth. Live-streaming the data to a computer or tablet allows fast sharing and report creation.



Features

- Bluetooth functionality with Android and iOS devices
- Wavelength ID mode detects signal from DLS 650/DLS 655 light sources and automatically switches wavelength settings
- 10,000+ data point storage - test multiple sites and offload data from individual folders
- Audible modulation alert for 2kHz, 1kHz, and 270Hz tones
- Interchangeable input connector adapters
- Measures 850, 1300, 1310, 1490, 1550, 1611, 1625nm wavelengths

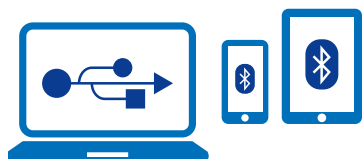

Connect to PC via USB or wireless device via Bluetooth to transfer data, edit readings, and create reports.



Dual-wavelength view allows simultaneous testing of two wavelengths when used with the DLS 650 or DLS 655 light source.



Unit comes with a 2.5mm universal input adapter. Additional adapters are available; see next page for a full list of adapters.



Hard-sided, padded carrying case included.

Specifications

OPTICAL POWER METER	
Detector Type	-02: InGaAs / -04: Filtered InGaAs
Measurement Range	-02: +6 to -70dBm / -04: +23 to -45dBm
Wavelength Range	850nm to 1650nm
Selectable Wavelengths	850 / 1300 / 1310 / 1490 / 1550 / 1611 / 1625 nm
Resolution	0.01dB
Absolute Accuracy	± 0.25 dB (0dBm, 22C to 25C)
Optical Interface	Universal 2.5mm (Additional Adapters Available)
Display	LCD
Tone ID	2kHz, 1kHz, 270Hz
Storage	10,000+ Measurements, 4 storage folders
Data Transfer	Micro USB or Bluetooth
Power	Push Button Toggle / Auto OFF
Battery	AA - 2 Alkaline Batteries Included
Dimensions	5.8cm x 21.5cm x 3.0cm
Weight	6 oz

Ordering Information - Accessories

Power Meter Adapters

PART NO.	DESCRIPTION
AC 020	2.5 mm Universal Adapter
AC 021	1.25 mm Universal Adapter
AC 026	SC Adapter for Optical Power Meter
AC 027	ST Adapter for Optical Power Meter
AC 028	FC Adapter for Optical Power Meter
AC 029	LC Adapter for Optical Power Meter
AC 126	SC/APC Adapter for Optical Power Meter

Patch Cord Accessories

PART NO.	DESCRIPTION
AC 500	SM SC-LC - 1m Simplex
AC 501	SM SC-SC - 1m Simplex
AC 502	SM LC-LC - 1m Simplex
AC 550	MM SC-LC - 1m Simplex
AC 552	MM LC-LC - 1m Simplex
AC 600	SC-SC Simplex Bulkhead Adapter
AC 601	LC-LC Simplex Bulkhead Adapter
AC 602	LC-LC Duplex Bulkhead Adapter

Cleaning Tools

PART NO.	DESCRIPTION
AC 089	One-Click Cleaner for 1.25mm & ODC Ferrules / Bulkheads
AC 099	One-Click Cleaner for 2.5mm Ferrules / Bulkheads
AC 090	1.25mm Swabs (100 per Pack)
AC 091	2.5mm Swabs (100 per Pack)
AC 092	SqR Pad & Fiber Wash Pen
AC 190	CletoP Cleaner - Type B - Blue Tape

M-DS028-09 RP 560

Windows is a registered trademark of Microsoft Corporation in the United States and/or other countries. Android is a trademark of Google LLC. Apple is a registered trademark of Cisco in the U.S. and other countries and is used under license. The Bluetooth word mark is a registered trademark owned by Bluetooth SIG, Inc.

Ripley ODM® brand test equipment is furnished with a 2 year warranty extending from the original date of purchase. Contact Ripley Tools for information on recalibration and repair of test equipment. Ripley makes every effort to ensure that all information in this data sheet is accurate. Ripley Tools assumes no responsibility for any errors or omissions and reserves the right to modify this document at any time without notice. Please contact Ripley ODM® brand specialists for pricing and availability of equipment.

